

FTM - GMP

A New Generation CE certified Semi Automatic Carton Sealing Machine

CE certified
GMP Model



Features and Benefits

- Made of SS 304 - GMP standard
- Auto - Off Switch - power saving
- Easy belt replacements for quick maintenance
- Telescopic legs precision-bed height adjustment
- Positive top and bottom drive - for sealing tall and heavy cartons as also regular cartons
- Reliable, robust design - longer life
- Caron Counter with electronic digital display unit
- Inbuilt Tool Box for ease of maintenance
- Belt Guards for safety
- Belt speed of 20m/minute-internationally benchmarked



SIGNODE[®]

FTM - GMP

A New Generation CE certified Semi Automatic Carton Sealing Machine

Specifications

	Minimum	Maximum
Carton size (mm)		
Length	150	Unlimited
Width	160	550
Height	100	550
Carton weight carrying capacity(Kg)	5	50
NB: Any carton size approaching the following limits should be test run to assure performance $\frac{\text{Length of the carton}}{\text{Height of the carton}} > 0.6$		
Machine Length (mm)	1080	
Machine Width (mm)	800	
Machine Height (mm)	1550	
Motors	2 Nos. of 0.25 HP (Geared)	
Voltage/Frequency	230V AC, 1 PH 50 Hz	
Power Consumption	360 Watts	

Options

Entry or exit conveyors of stainless steel.
Length : 0.5 Meters or 1 Meter.

Taping heads for 63.5 mm (2.5") or 76.2 mm (3") BOPP Tape


Applications

Specially designed for Pharmaceutical and Food industries to meet GMP requirements

Recommended for use with Signode's PACKRITE BOPP tape available in 650 M / 1000 M rolls

 **SIGNODE**[®]
Your partner in industrial packaging world wide

E: info@signodeindia.com | **W:** www.signodegroup.com

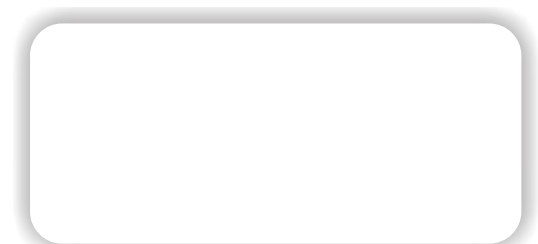

Toll Free Number for Services 1800 419 1466