


Mini

Case Sealing solutions for smaller cartons



Mini with
flap closer
On-Line

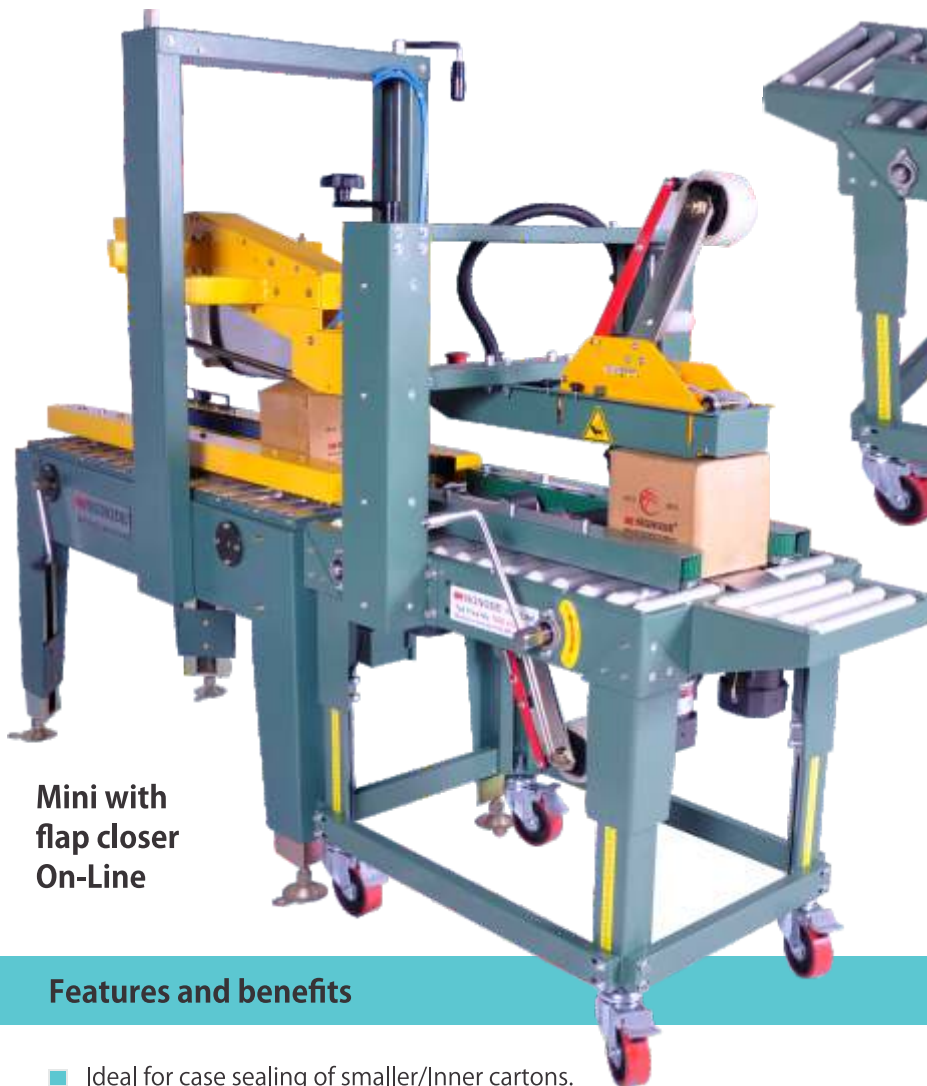

Mini- Off line



Features and benefits

- Ideal for case sealing of smaller/Inner cartons.
- Twin mast column for greater stability during operation
- Spring loaded top drive set for smooth flow and no damage to delicate cartons.
- Uniform & controlled pressure during taping
- Consistent tape overlap.
- Telescopic legs for height adjustment
- Quick & simple adjustment for varying carton sizes


Case Sealing solutions for smaller cartons

Technical Data		
Machine Specification	Mini	Mini with Flap closer
Taping Head	1.5"/ 2"	1.5"/ 2"
Length	1090 mm	1956 mm
Width	660 mm	659 mm
Height	1130 mm	1545 mm
Weight	85 Kg	150 Kg
Color	RAL 6000	RAL 6000 & RAL 1021 Yellow (Moving Parts)
Drive Motor	0.25 HP, 2 No.	0.12 HP- 4 No.
Machine Through put	Up to 25 cartons/ Min depending on Carton length	Up to 20 cartons/Min
Utility Requirements		
Air Requirement	NA	6 Bar
Air Consumption	NA	~ 1 CFM
Power Supply	230 VAC, Single Phase, 50 Hz	230 VAC, Single Phase, 50 Hz
Power Consumption	0.12 KW	0.6 KW
Tap Roll Length	65 M/ 650 M/ 1000 M	650 M/ 1000 M
Case Dimensions		
Length	120 mm - Unlimited	120mm-320mm
Width	100 mm -450 mm	100mm-200mm
Height	50 mm -300 mm	50mm-300mm
Weight	1- 20 Kg	1-20 KG
Carton Ply	Min 3 Ply	Min 3 Ply



Your partner in industrial packaging world wide

E: info@signodeindia.com | W: www.signodegroup.com

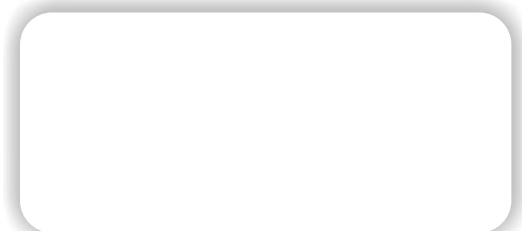

Toll Free Number for Services 1800 419 1466